

ZX20-CM/ZX20-CM-SOi

Ceiling Mount . ZX20 Series



Product Features

- Ceiling mount lighting for architectural down light application.
- ETL outdoor wet location listed. IP65 standard.
- Machined from solid billet 6061-T6 corrosion resistant aluminum.

Specification

Materials: Machined from billet 6061-T6 corrosion resistant aluminum with 304 stainless steel hardware. Available in 304/316 stainless steel or 360 brass upon request.

Hood and Glare Shield: 2 available hood options to suit any application. 3 optional glare shields (short, long, angled) to complement each hood choice. See page 2 for details.

Light Source: PAR20 Halogen lamp or PAR20 SORAA® LED lamp. Please refer to [SORAA PAR20](#) for lamp selection.

Voltage: 120V or 230V AC.

Wattage: Max. 50W for Halogen PAR20 lamp. Max. 11W for SORAA PAR20 lamp.

Lamp Base/Socket: Standard socket for E26.

Dimmability: Phase dimming, with trailing edge dimming preferable. Please refer to website for [SORAA® PAR20 dimmer compatibility](#).

Finish: Polyester powder coat on all aluminum materials with RoHS compliant procedures. Anodized finish is available. Stainless steel and brass models are provided with brushed

Optical Accessories: Accepts up to 3 accessory pieces (hexcel louver, optical lenses, dichroic color filters, etc.). Secured in place with metal snap ring.

Mounting Method: Utilizes 2x 8-32 UNC machine screws (provided) to attach to a standard octagon recessed back box (provided by others).


Ordering Guide

EXAMPLE: ZX20-CM-SOi - B - GSL - 120V - 01607 - BK - LVR - CM5

SERIES	MATERIAL	HOOD	OPTIONAL GLARE SHIELD	VOLTAGE	OPTIONAL LAMP	FINISH	OPTIONAL SELECT UP TO 3 OPTIC ACCESSORIES	OPTIONAL MOUNTING ACCESSORIES
ZX20-CM HALOGEN	BLANK Aluminum(Standard) NBR Natural Brass NSS Natural Stainless Steel CU Natural Copper	B B-HOOD	GSL GSA GSS	120V 230V	0--NONE XXXXX SORAA® LAMP CODE (5 DIGIT SORAA CAT. NO®)	Standard BK Black Powder Coat BZ Bronze Powder Coat WT White Powder Coat Premium ABK Anodized Black ACL Anodized Clear CC Custom Powder Coat	LVR Hexcel Louver OSL Overall Spread Lens LSL Linear Spread Lens SOL Solite Soft Focus DF Dichroic Filter	See page 2 for quick reference, or " Accessories " link for detailed specification.
ZX20-CM-SOi SORAA®		C C-HOOD	CGSL CGSA CGSS					


Product Drawings

NOTE: Specification and dimensions subject to change without notice.

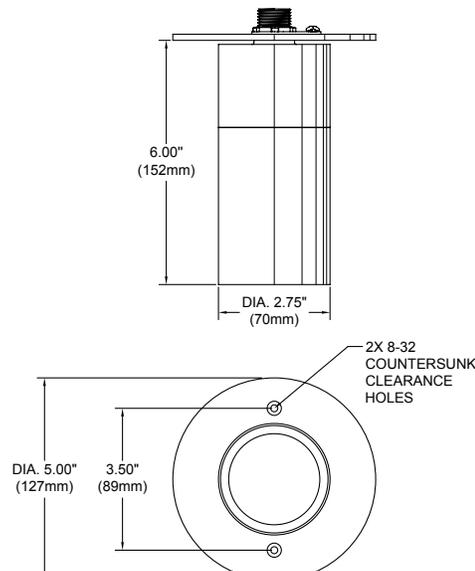


Product Options & Accessories

Hood Options




B-HOOD
Regressed lens for glare control. Used in an interior or down light application.




C-HOOD
Flush hood with machined threading on the outside for attachment of C-style glare shield, cleverly designed with hidden drainage channels.


Optional Glare Shield

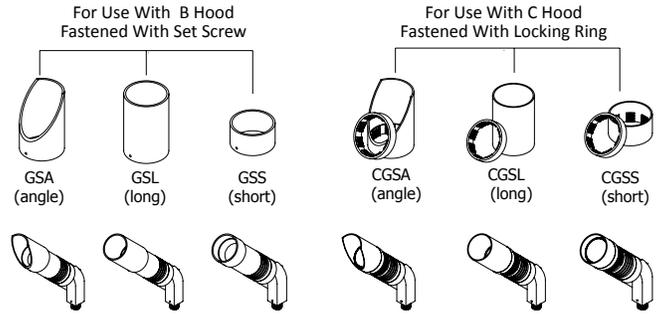

Canopy Plate:



Fixture On CM5




CM1


CM3

CM5

Surface Mount Box:



Fixture On CB5.1



CB4.0

CB4.0-SQ

CB5.1

CB5.5

CB5.5-K/O

Notes