

# MHVL

ACCESSORIES | Ground Mount / Spike

## FEATURES

- Telescopic stainless steel 3-prong stake.
- 6" or 12" prong length.
- Provides great stability.
- Easy to move around.
- For 12V or line voltage installation.



Telescopic Spike Ground Mount: MHVL-12-6-12-BK

## SPECIFICATIONS

### Materials

Spike assembly - 304 stainless steel, 304 stainless steel hardware.

### Finish

Polyester powder coat with RoHS compliant procedures.

### Mounting

Accepts all 1/2"-14 NPS male fitting.

### Application

For 12V or line voltage(120~277V) insallation.

### Line Voltage(120~277VAC)

#### Installation Kit

Includes protection sleeve and ingrade brass j-box.

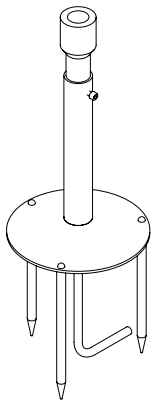
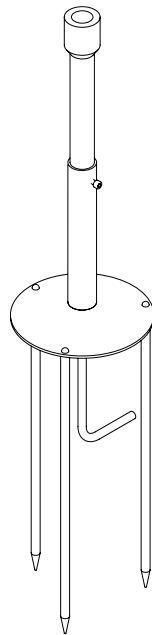
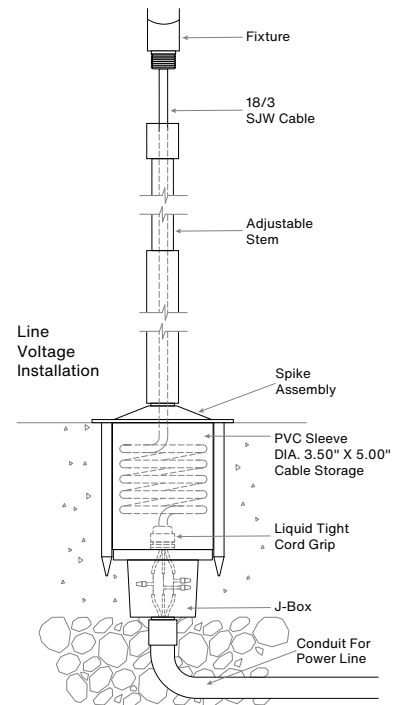
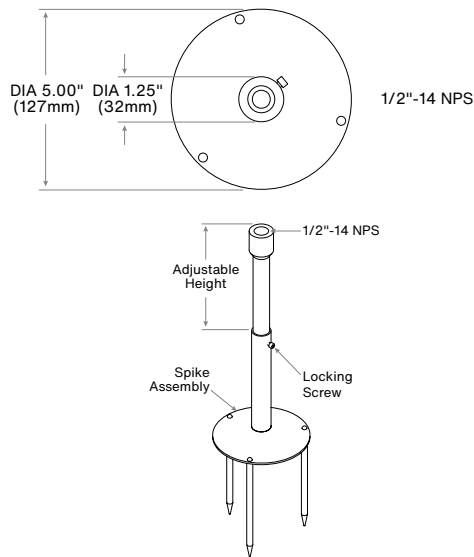
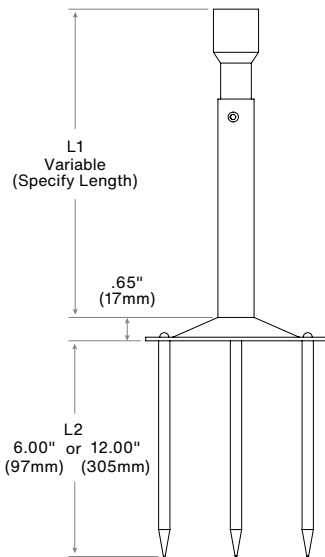
## ORDERING GUIDE

 EXAMPLE: **MHVL-12-6-12-BK**

| MODEL  | STAKE LENGTH                         | FINISH                             |
|--|--------------------------------------|------------------------------------|
| <b>MHVL-12</b><br>Spike MH02 Series<br>Ground Mount/3-Prong Spike<br>12V | <b>6-12</b><br>L1 - 6"-12" / L2 - 6" | <b>BZ</b> Bronze Powder Coat       |
|  |                                      | <b>BK</b> Black Powder Coat        |
|  |                                      | <b>NSS</b> Natural Stainless Steel |

 EXAMPLE: **MHVL-LINE-12-24-PVC-BK**

| MODEL   | STAKE LENGTH   | PROTECTION SLEEVE                        | FINISH                             |
|---|--|--|------------------------------------|
| <b>MHVL-LINE</b><br>Spike MH02 Series<br>Ground Mount/3-Prong Spike<br>120~277V | <b>12-24</b> L1 - 12"-24" / L2 - 12"<br><b>16-32</b> L1 - 16"-32" / L2 - 12"<br><b>20-40</b> L1 - 20"-40" / L2 - 12"<br><b>24-48</b> L1 - 24"-48" / L2 - 12" | <b>OPTIONAL</b><br><b>PVC</b> PVC Sleeve | <b>BZ</b> Bronze Powder Coat       |
|   |  |  | <b>BK</b> Black Powder Coat        |
|   |  |  | <b>NSS</b> Natural Stainless Steel |
|   |  |  |                                    |

**PRODUCT DRAWINGS**

**MHVL-12-6-12**

**MHVL-LINE-12-24**

**LENGTH OPTIONS**

| Size  | L1      | L2  |
|-------|---------|-----|
| 6-12  | 6"-12"  | 6"  |
| 12-24 | 12"-24" | 12" |
| 16-32 | 16"-32" | 12" |
| 20-40 | 20"-40" | 12" |
| 24-48 | 24"-48" | 12" |