

ZPPP

(includes former CMBL-150i-PP and CMBL-150-PP models)

PATH & BOLLARD | ZPPP Series | 3.15"
120V



Commercial Power Post: ZPPP-1P1-ABR

FEATURES

- Rectangular 120V bollard-style commercial power post with one or two GFCI power receptacles and the ability to include USBA or USBC charging ports. Stands 18" high.
- Wet Location Listed, IP67 standard.
- Extruded aircraft grade (6061-T6), corrosion-resistant aluminum, then anodized and powder coated to create a highly durable, marine grade finish.
- Every fixture tested end of line for water tightness and light quality.

SPECIFICATIONS

Materials

Extrusion of 6061-T6 corrosion resistant aluminum with 304 stainless steel hardware.

Finish

Aluminum materials are first anodized and then powder coated for a robust, marine grade finish.

Voltage

120V AC

Power Receptacle/USB Charging

Includes one or two GFCI power receptacles that can be combined with USBA or USBC charging ports. This enables up to 4 power socket plug-ins and 4 USB plug-ins.

Mounting

Use anchor bolts size 5/16" or 3/8" (by others, not included with fixture).

Listings

ETL Listed for Wet Location, IP67 Standard. RoHS Compliant.

ORDERING GUIDE

 EXAMPLE: **ZPPP-1P1-ABL-120V-18-GFI-GFI**

MODEL	PHYSICAL OPTIONS	MATERIAL /FINISH	POWER	HEIGHT	POWER OPTION 1																														
ZPPP			120V																																
ZPPP Series Commercial Power Post	<table border="1"> <tr> <td>1P1</td> <td>Line Voltage, one Receptacle</td> </tr> <tr> <td>1P2</td> <td>Line Voltage, two Receptacles</td> </tr> </table>	1P1	Line Voltage, one Receptacle	1P2	Line Voltage, two Receptacles	<table border="1"> <tr> <td>ABL</td> <td>Aluminum Black</td> </tr> <tr> <td>ABR</td> <td>Aluminum Bronze</td> </tr> <tr> <td>AWH</td> <td>Aluminum White</td> </tr> <tr> <td>AAC</td> <td>Aluminum Anodized Clear¹</td> </tr> <tr> <td>CCC</td> <td>Custom Finish¹</td> </tr> </table>	ABL	Aluminum Black	ABR	Aluminum Bronze	AWH	Aluminum White	AAC	Aluminum Anodized Clear ¹	CCC	Custom Finish ¹	<table border="1"> <tr> <th colspan="2">VOLTAGE</th> </tr> <tr> <td>120V</td> <td>120V AC</td> </tr> </table>	VOLTAGE		120V	120V AC	<table border="1"> <tr> <td>18</td> <td>18"</td> </tr> <tr> <td>CC</td> <td>Custom</td> </tr> </table>	18	18"	CC	Custom	<table border="1"> <tr> <td>GFI</td> <td>GFCI</td> </tr> <tr> <td>GFA</td> <td>GFCI w/USBA</td> </tr> <tr> <td>GFC</td> <td>GFCI w/USBC</td> </tr> <tr> <td>BLN</td> <td>Blank</td> </tr> </table>	GFI	GFCI	GFA	GFCI w/USBA	GFC	GFCI w/USBC	BLN	Blank
1P1	Line Voltage, one Receptacle																																		
1P2	Line Voltage, two Receptacles																																		
ABL	Aluminum Black																																		
ABR	Aluminum Bronze																																		
AWH	Aluminum White																																		
AAC	Aluminum Anodized Clear ¹																																		
CCC	Custom Finish ¹																																		
VOLTAGE																																			
120V	120V AC																																		
18	18"																																		
CC	Custom																																		
GFI	GFCI																																		
GFA	GFCI w/USBA																																		
GFC	GFCI w/USBC																																		
BLN	Blank																																		


¹ Consult factory for specialty finish quoting and lead times.

OPTIONAL INSTALLED ACCESSORIES
POWER OPTION 2


GFI	GFCI
GFA	GFCI w/USBA
GFC	GFCI w/USBC
BLN	Blank

Notes:

PRODUCT DRAWINGS




ZPPP-1P1
with 1 Power Receptacle



ZPPP-1P2
with 2 Power Receptacles

ZPPP-1P1

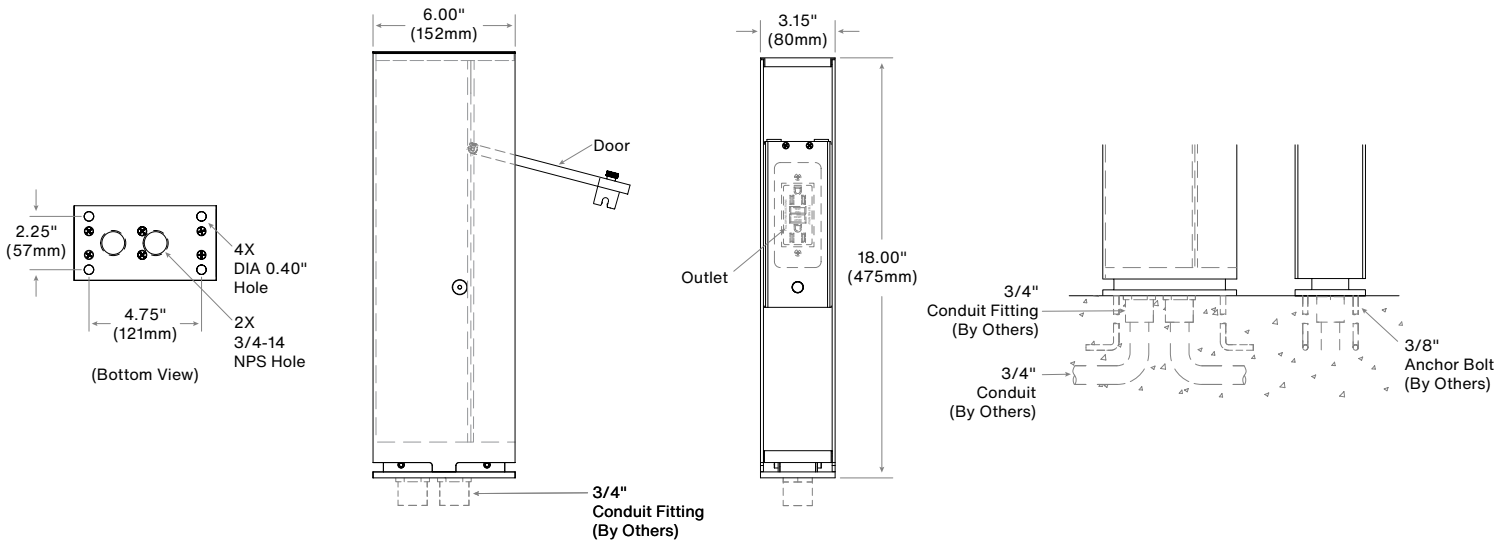

ZPPP-1P2

