

ZGLA1

ANCHOR SERIES

1" Step & Marker



Precision in
the Smallest Detail



ANCHOR SERIES

1" Step & Marker




The ZGLA1 delivers full optical precision from a one-inch in-grade form. The 1.7 watt LED delivers 150 lumens with beam options of 20°, 35°, and 60°. Compact and discreet, it installs cleanly into steps, markers, and architectural details with uniform, glare-controlled illumination and durable, marine-grade brass construction.



Designed for steps, markers, and architecture

Compact and discreet, the ZGLA1 integrates cleanly into steps, markers, and architectural details, delivering controlled light without visual clutter.



Black Bronze Brass

1.00" dia.

1.7W (150lm)

2700K, 3000K, 3500K, 4000K

CRI 90. HK LED Light engine.

Standard Direct View, Glare Shield,
Top Cover 360°, Top Cover 180°,
Path / Wall Wash

Precision-machined from
corrosion-resistant brass.

Micro scale.

True performance.

At just one inch, the ZGLA1 pairs focused optics with a seamless bezel to deliver true performance at micro scale.




ANCHOR SERIES

1" Step & Marker



Minimal footprint. Maximum effect.

Focused illumination that shapes the outdoor environment with precision and intent, delivering power typically found in much larger in-grade housings.

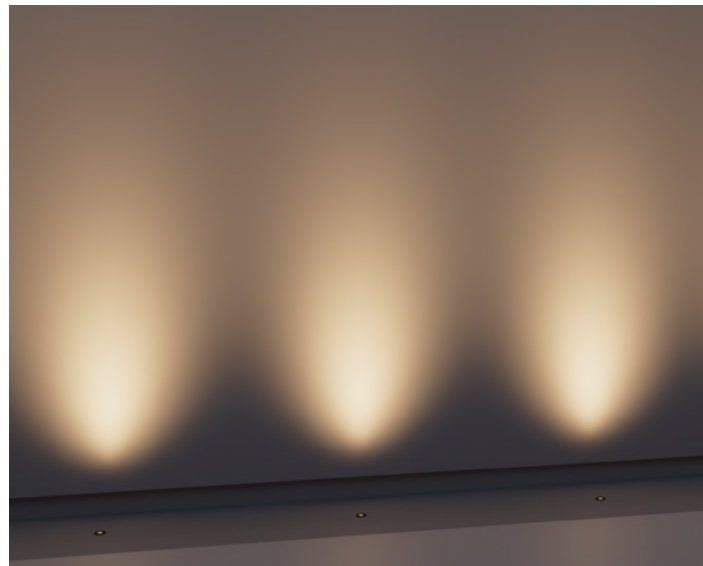

Simple install for perfect alignment

Installs in any nominal one-inch drilled hole. Placement in soil, decking, or concrete is simple, and the rotational aim system aligns the fixture cleanly without tools.



Discreet design, bold results

The ZGLA1 blends into its surroundings. Focused light and refined optics reveal architectural detail without distraction.



Built to last in solid brass

Machined from marine-grade brass and sealed to IP68. The ZGLA1 endures harsh environments and maintains finish integrity and watertight performance.



Architectural quality, simplified

Readymade configurations ship quickly with prewired leads and included accessories. The integrated LED, shallow housing, and PVC sleeve reduce installation time and total project cost.

ZGLA1

ANCHOR SERIES

1" Step & Marker




STANDARD, DIRECT VIEW

Focused accent for architecture and landscape details.




GLARE SHIELD

Controlled illumination with reduced glare and soft contrast.




TOP COVER 360°

Uniform light for smaller surfaces and safe passage.



TOP COVER 180°

Half-beam light for pathways, steps, and edges.



PATH / WALL WASH

Even illumination for pathways, walls, and architectural surfaces.

| | | | | | |
|------------------------------|--|----|-----|------------------|--------------------------|
| Installation Diameter | 0.98" dia. | | | | |
| Bezel Diameter | 1.50" dia. | | | | |
| Optics | Narrow (20°), Medium (35°), Wide (60°) | | | Shield Optimized | |
| Light Aimability | Full 360° rotation | | | | |
| Voltage | 12V | | | | |
| Watts (Lumens) | 1.7W (150lm) | | | | |
| Light Engine | HK LED | | | | |
| Light Quality | CRI 90 | | | | |
| CCT Options | 2700K, 3000K, 3500K, 4000K | | | | |
| Material | Solid corrosion-resistant brass with stainless steel hardware | | | | |
| Finish | Patinaed Brass, Black Powder Coated Brass, or Bronze Powder Coated Brass | | | | |
| Dimming | MLV or ELV Phase Control | | | | |
| Rated LED Life | 50,000 hours | | | | |
| Drive-Over Rated | Yes | No | No | Yes | No |
| Dark Sky Compliant | No | No | Yes | Yes | Conditional ¹ |
| Listings | ETL Listed for Wet Location, IP68. RoHS Compliant | | | | |
| Readymade | Eligible configurations ship in 2 to 4 weeks | | | | |

¹Path / Wall Wash style may qualify for Dark Sky applications when installed in downward-facing orientations.

How can we help illuminate
your next project?

HK LIGHTING

2151 Anchor Ct,
Thousand Oaks, CA 91320
805.480.4881

sales@hklighting.com
hklighting.com