

SIGN-2-11L

SIGN & POLE MOUNT | SIGN11 Series | 1.65" dia.
5-7W (450-675lm) | 12V | HK LED

Project Name


Fixture Type

FEATURES



IP67

- Twin-head (5-7W)x2 LED modular sign light.
- CSA Listed for Wet Location, IP67 Standard.
- Utilize adjustable accent fixture head with directional light.
- Machined from solid billet 6061-T6 corrosion-resistant aluminum.
- Accommodates different beam spread reflectors and optic accessories.
- Modular components - field changeable LED module & beam spread reflectors.

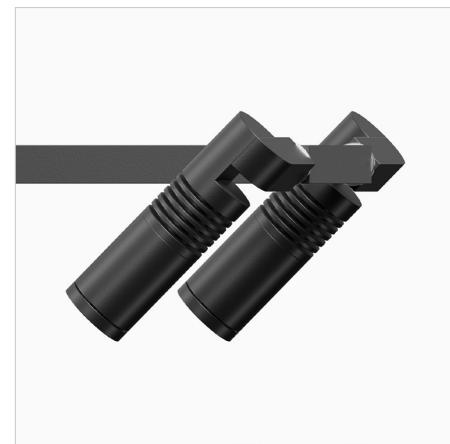

Low Voltage Twin-Head LED Sign Light - Fitted:
SIGN-2-11L in Black

SPECIFICATIONS

Materials

Machine from solid billet 6061-T6 corrosion-resistant aluminum with 304 stainless steel hardware. Available in 304/316 stainless steel or 360 brass upon request.

Finish

Polyester powder coat on all aluminum materials with RoHS compliant procedures. Anodized finish is available. Stainless steel and brass models are provided with brushed surface.

Hood and Glare Shield

3 available hood options to suit any application. 3 optional glare shields (short, long, angled) to complement each hood choice. (See page 4 for details)

Voltage

12V AC. Requires remote step down transformer.

Wattage

(5 or 7W)x2 HK LED.

Light Source

CRI 83. Available in CRI95 upon request. The chromaticity range is within a 3-step McAdam Ellipse. Standard CCT options are 2700K, 3000K, 4000K.

Dimming

MLV or ELV.

Optics

Accepts up to 3 accessories (hexcel louver, optical lenses, dichroic color filters, etc.). Secured in place with a metal snap ring.

Lamp Base/Socket

Innovative cone-shaped lamp base and receptacle socket maximize the surface contact area to dissipate heat more effectively. (See "Resources" for details)



ORDERING GUIDE

EXAMPLE: SIGN-2-11L-A-12V-5-27-29-BZ-12-GSA-LVR-CM5

MODEL	MATERIAL	HOOD	VOLTAGE	WATTAGE (Per Light)	CCT	OPTICS	FINISH	EXTENSION
SIGN-2-11L			12V					
SIGN11 Series 1.65" Sign Light Integrated HK LED	BLANK Aluminum (Standard)	A A Style: Weeping	12V 12V AC	5 5 Watts	27 2700K	29 (29°)	BK Black Powder Coat	LENGTH
	NBR Natural Brass ¹	B B Style: No Weep Holes		7 7 Watts	30 3000K	40 (40°)	BZ Bronze Powder Coat	
	NSS Natural Stainless Steel ¹	C C Style: Threaded, Weeping			40 4000K	57 (57°)	WT White Powder Coat	12 12"
	CU Natural Copper ¹						ABK Anodized Black ¹	24 24"
							ACL Anodized Clear ¹	30 30"
							CC Custom Powder Coat ¹	

¹ Consult factory for specialty finish quoting and lead times

OPTIONAL INSTALLED ACCESSORIES

GLARE SHIELD	OPTIC (Select up to 3)	MOUNTING
GSA A/B Glare Shield Angled	LVR Hexcel Louver	CANOPY MOUNT
GSL A/B Glare Shield Long	OSL Overall Spread Lens	
GSS A/B Glare Shield Short	LSL Linear Spread Lens	
CGSA C Glare Shield Angled	SOL Solite Soft Focus	CM1 3.75" Square Canopy Plate
CGSL C Glare Shield Long	DCF Dichroic Filter	CM3 4.75" Square Canopy Plate
CGSS C Glare Shield Short		SURFACE MOUNT
		CB4.0 4" Round Surface Box
		CB5.5 5.5" Round Surface Box

• Most common listed, see Page 4 for additional options

OUTDOOR MAGNETIC TRANSFORMERS (120V input/12VAC Output)


TRANSFORMERS (Go to [Accessories](#) for detailed specification)

EXAMPLE: TXS-150-SS



MODEL		WATTAGE (VA)				PRIMARY VOLTAGE (VAC)	
TXM	Stainless steel, wet location outdoor magnetic transformer Multitap 12-15VAC Output MLV Dimming	150	300			OTR-SS (120V Only)	
TXS	Stainless steel, wet location outdoor magnetic transformer Multitap 12VAC Output MLV Dimming	150	300	600		SS (120V Only)	
TXM	Compact, damp location magnetic transformer 12VAC Output MLV Dimming	20	40	60	100	120	
IGT	In ground outdoor magnetic transformer 12VAC Output MLV Dimming	50 (120V Only)		100	300	120	277
TXE	In-fixture or near mounted electronic transformer 12VAC Output ELV Dimming Enclosure by others	60				120	277



PRODUCT DRAWINGS

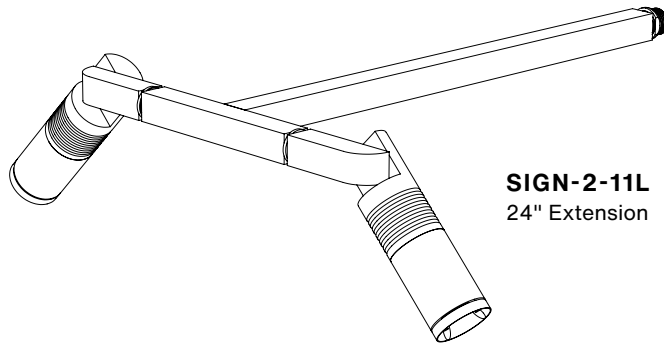


SIGN-2-11L
24" Extension

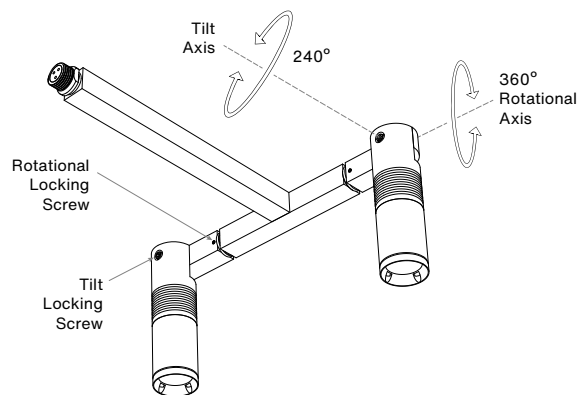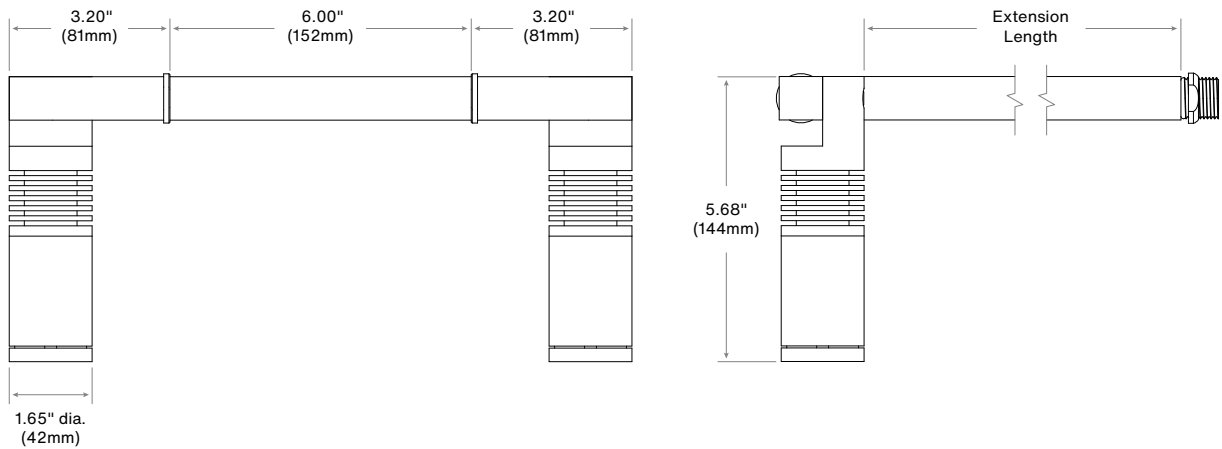


OPTIONS & ACCESSORIES

HOOD OPTIONS




A HOOD

Versatile hood with 8 weep holes for water drainage. Regressed lens for glare control. Suggested for general use or when fixture is aimed in an up position.



B HOOD

Similar to A hood but without weep holes. Regressed lens for glare control. Suggested for downlighting and interior applications.




C HOOD


Designed for permanent use with a glare shield and innovative drainage design for water and debris. The machined threads enable ongoing glare shield adjustment, without impact to the paint surface.

OPTIONAL GLARE SHIELD

For use with A & B Hood,
Fastened with Set Screw




For use with C Hood
Fastened with Locking Ring



MOUNTING ACCESSORIES

Canopy Mount:



Fixture On CM5



CM2



CM1




CM3



CM5

Surface Mount Box:



Fixture On CB5.1



CB3.5



CB4.0



CB4.0-SQ



CB5.1



CB5.5



CB5.5-2K


Notes:

PHOTOMETRY & ENERGY DATA

SIGN-1-11L Per Light (Narrow)

Input Power	8.1W
Color Temperature (CCT)	3000K
Color Rendering Index (Ra)	90+
Beam Angle	28.7°
Max. Candlepower	1964cd
Delivered Lumens	636lm
Efficacy	78lm/W

Polar Graph - Intensity



Cone of Light - Illuminance


Center Beam (fc)	Beam Diameter	Distance
491	1.0'	2.0'
123	2.0'	4.0'
55	3.0'	6.0'
31	4.0'	8.0'
20	5.0'	10.0'

1/2 Beam Angle: 28.7°

SIGN-1-11L Per Light (Medium)

Input Power	8.1W
Color Temperature (CCT)	3000K
Color Rendering Index (Ra)	90+
Beam Angle	39.2°
Max. Candlepower	1383cd
Delivered Lumens	632lm
Efficacy	78lm/W

Polar Graph - Intensity



Cone of Light - Illuminance


Center Beam (fc)	Beam Diameter	Distance
346	1.4'	2.0'
86	2.9'	4.0'
38	4.3'	6.0'
22	5.7'	8.0'
14	7.1'	10.0'

1/2 Beam Angle: 39.2°

SIGN-1-11L Per Light (Wide)

Input Power	8.1W
Color Temperature (CCT)	3000K
Color Rendering Index (Ra)	90+
Beam Angle	56.9°
Max. Candlepower	811cd
Delivered Lumens	675lm
Efficacy	83lm/W

Polar Graph - Intensity



Cone of Light - Illuminance

Center Beam (fc)	Beam Diameter	Distance
203	2.2'	2.0'
135	4.3'	4.0'
23	6.5'	6.0'
13	8.7'	8.0'
8	10.8'	10.0'

1/2 Beam Angle: 56.9°

WATTAGE MULTIPLIER

Wattage	Multiplier
5 Watt	0.67
7 Watt	1.00

CCT MULTIPLIER

Color Temp.	Multiplier
2700k	0.96
3000k	1.00
4000k	1.03