

# ZX20-WM-SQ/ZX20-WM-SQ-SOi

Wall Mount · ZX20 Series



## Product Features

- Fixed angle wall mount up light or down light with mounting canopy.
- ETL outdoor wet location listed. IP65 standard.
- Machined from solid billet 6061-T6 corrosion resistant aluminum.
- Swivel stem insert allows for precision adjustment during installation.
- Unique weep hole design in hood allows for either upward or downward facing installation with minimum light leak.

## Specification

**Materials:** Machined from billet 6061-T6 corrosion resistant aluminum with 304 stainless steel hardware. Available in 304/316 stainless steel or 360 brass upon request.

**Glare Shield:** 3 optional glare shields(GSL-long, GSA-angled GSS-short) for additional glare control. See page 2 for details.

**Light Source:** PAR20 Halogen lamp or PAR20 SORAA® LED lamp. Please refer to [SORAA.PAR20](#) for lamp selection.

**Voltage:** 120V or 230V AC.

**Wattage:** Max. 11W for SORAA PAR20 lamp.

**Lamp Base/Socket:** Standard socket for E26.

**Dimmability:** Phase dimming, with trailing edge dimming preferable. Please refer to website for [SORAA® PAR20 dimmer compatibility](#).

**Finish:** Polyester powder coat on all aluminum materials with RoHS compliant procedures. Anodized finish is available. Stainless steel and brass models are provided with brushed surface.

**Optical Accessories:** Accepts up to 3 accessory pieces (hexcel louver, optical lenses, dichroic color filters, etc.). Secured in place with metal snap ring.

**Mounting Accessory:** Utilizes 2x 8-32 UNC machine screws (provided) to attach to a standard octagon recessed back box (provided by others).


## Ordering Guide

EXAMPLE: ZX20-WM-SQ-SOi - GSL - 120V - 01607 - BK - LVR - CM3  
ZX20-WM-SQ - GSL - 120V - 0 - BK - LVR - CM3

SERIES	MATERIAL	OPTIONAL GLARE SHIELD	VOLTAGE	OPTIONAL LAMP	FINISH	OPTIONAL, SELECT UP TO 3 OPTIC ACCESSORIES	OPTIONAL MOUNTING ACCESSORIES
ZX20-WM-SQ HALOGEN	BLANK Aluminum(Standard) NBR Natural Brass NSS Natural Stainless Steel CU Natural Copper	GSL GSA GSS	120V 230V	0-NONE  XXXXXX SORAA® LAMP CODE (5 DIGIT SORAA CAT. NO*)	Standard BK Black Powder Coat BZ Bronze Powder Coat WT White Powder Coat Premium ABK Anodized Black ACL Anodized Clear CC Custom Powder Coat	LVR Hexcel Louver OSL Overall Spread Lens LSL Linear Spread Lens SOL Solite Soft Focus DF Dichroic Filter	See page 2 for quick reference, or " <a href="#">Accessories</a> " link for detailed specification.
ZX20-WM-SQ-SOi SORAA®							


## Product Drawings

NOTE: Specification and dimensions subject to change without notice.

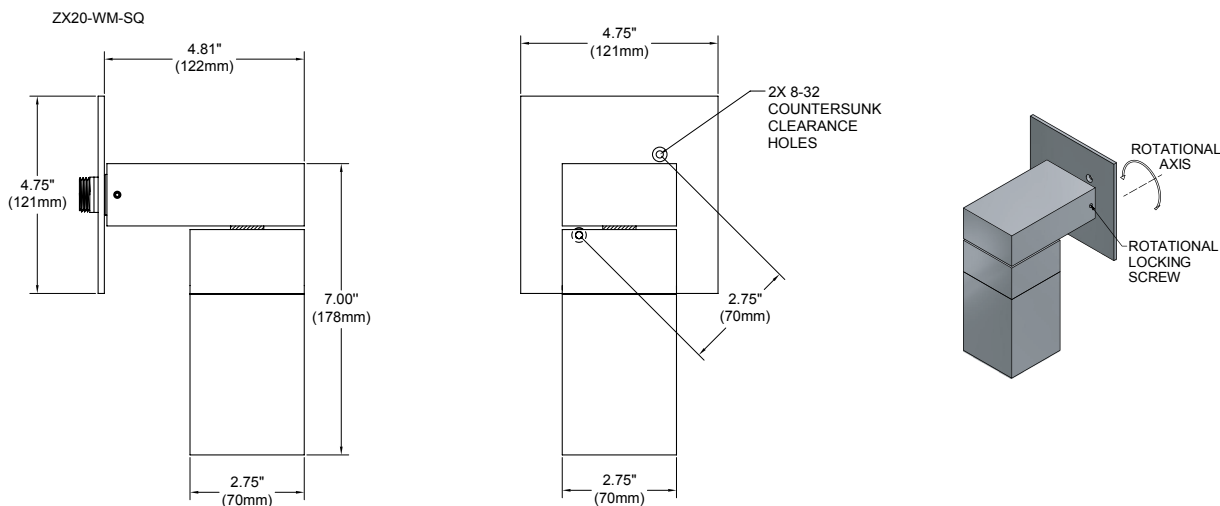


## Product Options & Accessories

### Optional Glare Shield

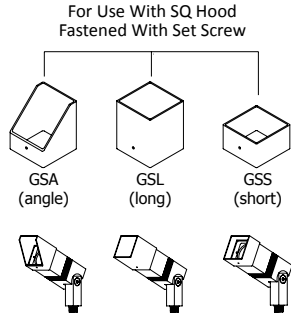


### Mounting Accessories

#### Canopy Plate:

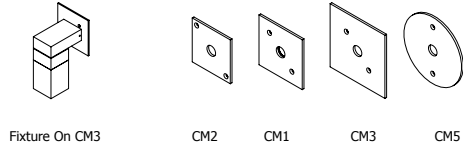

#### Surface Mount Box:

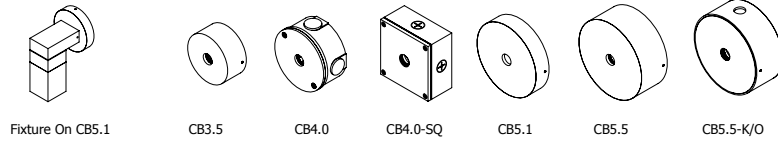

### Notes